


# WIRE WOUND TYPE COMMON MODE FILTER

Part NO:HT3416L600T-HF




## Features:



1. High common mode impedance at high frequency cause excellent noise suppression performance.
2. HT0805D801PT-HF series realizes small size and low profile.
3. 3.4x1.6x2.0mm.
3. 100% Lead(Pb) & Halogen-Free and RoHS compliant

## 1. SHAPE & DIMENSION

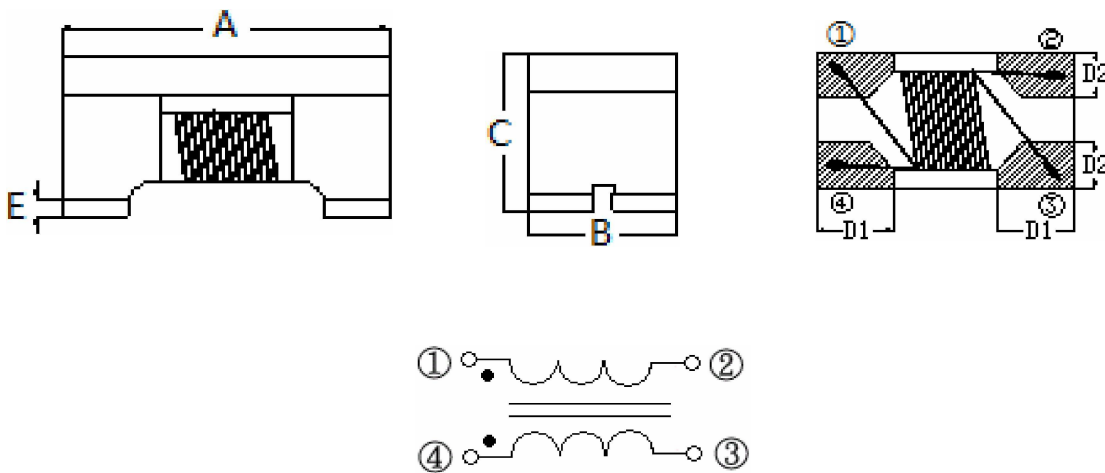


CODE	A	B	C	D1	D2	E
DIMENSION	3.4±0.20	1.6±0.20	2.0±0.20	0.64TYP	0.66TYP	0.12Typ

## 2.ELECTRICAL CHARACTERISTICS@25°C

Part Number	L	Freq	Rdc	Irms	Rated vol	Min insulation Resistance
	(uH)MIN	(MHz)	(Ω)max	(mA)max	Volts	MΩ
HT3416L600T-HF	60	100/0.1V	1.7	200	50	10

## 3,PART NUMBERING SYSTEM



- 1 PRODUCT SYMBOL 产品代号
- 2 DIMENSIONS 规格尺寸
- 3 MATERIAL FERRITE CORE 磁芯材料
- 4 TYPE 方式
- 5 IMPEDANCE 阻抗 801=800Ω INDUCTANCE(电感量) 600=60UH
- 6 PACEAGING 包装方式 T 盘装 B 散装
- 7 E.P. 环保: LF-LEAD Free HF-Halogen Free FP-Red phosphor Free

**HQST ELECTRONICS CO., LTD.**

<https://shop104373926.taobao.com/>

石门盈盛电子科技有限公司

TEL:0755-21083343 18673625585

[www.wangluobianyaqi.cn](http://www.wangluobianyaqi.cn)

E-mail:hqst008@163.com